



Eurosystems
The future down to earth
CATALOGUE 2025



4 season



Haymaking



Artificial
lawn



Lawn



Garden



Soil


The use of FSC-certified paper is just one part of Eurosystems efforts to reduce its environmental impact.

The 2025 catalogue and all the product use and maintenance manuals are made in this way.

The Forest Stewardship Council is an international non-profit NGO and is the only certification organisation that is recognised internationally today.

There are currently about 230 million hectares of forests certified worldwide, of which 75 thousand are located in Italy.

This certification ensures that the forests are managed in a way that preserves biodiversity, minimises environmental impacts and provides economic and social benefits to local communities.



A large, abstract teal graphic in the top left corner, consisting of several overlapping curved shapes that resemble a stylized leaf or a modern logo element.

The future down to earth

“

It is no coincidence
that we were born
here, everyone here
has worked the
fields for centuries

Carlo Bovi


Ours is a constantly evolving artisan work. We create machines that are simple to use and last over time, designed to bring different generations closer to gardening and horticulture.

We want to facilitate these jobs to make them accessible to everyone, just like nature.

Our products are manufactured in Italy and they reach many destinations: a piece of our history thus arrives in the garden or in the company of a customer on the other side of the world who shares our own passion.

It all started 50 years ago from Luzzara, in the province of Reggio Emilia, where we have seen our fathers work the land and then we have learned too.

Here our story began and from here it continues and continues to grow.



Index

4 SEASONS – MULTI TOOL | One engine, endless uses

Multi tool	PI30	08
	P70 evo	16
	P55 evo	24
	Minieffe	34

HAYMAKING – SCYTHE MOWERS, ROTARY SCYTHES | The art of mowing

Scythe mowers	M310	42
	M210	44
	M90	46
Rotary scythes	Rs210	48
	Rs90	50

ARTIFICIAL LAWN – DECOMPACTOR, MOTOR-BRUSHES | Synthetically... perfect!

Decompactor	Deco90	54
Motor-brushes	Sweepy	56
	Sandy	58
De-thatcher	Tpm42	60

LAWN – RIDE ON MOWERS, SCARIFIERS | A professionally prepared lawn


Ride on mowers	Slalom	64
	Asso	66
Scarifiers	Sc42 & Sc42F	68

GARDEN – WHEEL BARROWS, MOTOR-SPRAYER | Effortless gardeners

Motocarriole	Carry	72
Motosprayer	Carry Sprayer	74
	Eco Sprayer	76

SOIL – REAR TINE TILLERS, TILLERS | Passion for vegetable gardens

Rear tine tillers	Rtt3	80
	Rtt2	82
Tillers	Euro102	84
	Z8	86
	Euro5 evo	88
	Euro3 evo	92
	Z3	94
	Z2	96
	LaZappa	98
	Z1	100



4 SEASONS
Multi tool machines

One engine, endless uses.

The Eurosystems multi-tool machines are designed and built for maximising the engine's efficiency: allowing the machine to be used throughout the whole year means minimising the resources, the consumption and the maintenance.

From the hobbyist to the professional, from the care of wild lawns to the gardens, from the vineyards to the orchards, from the soil cultivation to the cleaning of outdoor surfaces, Eurosystems offers a series of models and tools that adapt to every need.

What are the benefits?

1

A wide range of tools designed to fully exploit the potential of the machine in all 4 seasons, maximising its effectiveness and possibilities of use

2

Better use of the storage area: even with limited space available, it will be possible to have a fleet of machines suitable for all work requirements

3

Reduction and efficiency of engine maintenance operations, less use of primary material resources and reduction of the related environmental impact

4 SEASONS

P130

multi tool



P130

ENGINE	B&S 3125 PB 344 cc 6.9 kW Petrol			B&S 3130 Intek 344 cc 7.8 kW Petrol			Honda GXV390 389 cc 7.6 kW Petrol		
STARTER	recoil			recoil & electric			recoil or recoil & electric		
HANDLEBAR	vertically and laterally adjustable + storage position								
TRANSMISSION	2 independent hydrostatic transaxels ZT-2200 (EZT) max slope: 25° max torque: from 0 to 291 Nm								
PTO	 multi-plate clutch vertical PTO with coupling								
SLOPE ENGINE	-								
STEERING SYSTEM	 PAS (powered assisted steering)								
DRIVE WHEELS	tyres, tractor profile (18x9.5-8")								
NET WEIGHT	162 kg			167 kg			169kg / 174kg		
DIMENSIONS	97x169x128(h)								

P130 ALPINE

ENGINE	Honda GXV390 389 cc 7.6 kW Petrol			B&S 4195 Intek 500 cc 11.7 kW Petrol			B&S Vanguard V-Twin 479 cc 11.9 kW / 16 HP Petrol		
STARTER	recoil & electric			recoil & electric			electric		
HANDLEBAR	vertically and laterally adjustable + storage position								
TRANSMISSION	2 independent hydrostatic transaxels ZT-2800 advanced max slope: 45° max torque: from 0 to 406 Nm								
PTO	 multi-plate clutch vertical PTO with coupling								
SLOPE ENGINE	electronic board and actuator for tilting of the engine								
STEERING SYSTEM	 PAS (powered assisted steering)								
DRIVE WHEELS	tyres, tractor profile (18x9.5-8")								
NET WEIGHT	178 kg			175 kg			184 kg		
DIMENSIONS	97x169x128(h)								



GR. WEIGHT	194-216 KG
PACKAGING	144X97X95(H) CM
PALLET	147X100X190(H) CM / Q* 2PCS



FOLDING HANDLEBAR
for placing into storage
position via control
console



CONTROL CONSOLE
speed management, tool
connection, work mode,
adjustment management



ADJUSTABLE HANDLEBAR
laterally (3 positions) and
vertically
(7+1 positions)



SLOPE ENGINE
with electronic board and
actuator, maximum side
slope 40-45°



TOOL COUPLING
vertical coupling with
instant handlebar
connection system



PAS STEERING SYSTEM
servo-assisted
zero turn



AS STANDARD



ALPINE VERSION



PATENTED

4 SEASONS

P130

multi tool

WHEELS & EXTENSIONS



IRON WHEELS

Track EZT 96 cm
Track ZT 99 cm



GROSS WEIGHT 37 KG

PACKAGING 52X52X55(H) CM



SMALL TYRES

Track EZT 81.6 cm
Track ZT 84.6 cm



GROSS WEIGHT 20 KG

PACKAGING 52X52X55(H) CM




IRON EXTENSION FOR TYRES

Track ZT
137.5 cm *Alpine



GROSS WEIGHT 38 KG

PACKAGING 52X52X55(H) CM



SNOW CHAINS

For standard pneumatic
wheels 18x9.5-8"



GROSS WEIGHT 3 KG

PACKAGING 52X52X55(H) CM



IRON EXTENSION FOR IRON WHEELS

Track ZT
149 cm *Alpine



GROSS WEIGHT 31.5 KG

PACKAGING 52X52X55(H) CM



CLAWED WHEELS

Track ZT
151 cm *Alpine



GROSS WEIGHT 20 KG

PACKAGING 52X52X55(H) CM

DOUBLE ROTARY SCYTHE

OPERATION cutting discs (x2) with 4 inclined, pivoting and retractable blades

WORK WIDTH 115 cm

ADJUSTMENTS fixed cutting height at 5 cm

TRANSPORT WHEELS two pivoting and tilting front wheels

OTHER

- protective sheet
- double-toothed drive belt
- automatic braking system
- idle rotating counter discs
- reinforced steel discs

NET WEIGHT 127 kg

DIMENSION 120x128x65(h) cm

 **G.WEIGHT** 142 KG - **PACKAGING** 130x120x65(H) CM - **PALLET** 130x120x130(H) CM / Q* 2PCS



4 SEASONS

P130

multi tool

FLAIL MOWER

OPERATION	ø 30 cm horizontal axis rotor with 32 floating knives
WORK WIDTH	80 cm
ADJUSTMENTS	cutting height 2<->10 cm with wheels 2<->7 cm with skids
TRANSPORT WHEELS	pivoting on tilting axle
OTHER	-
NET WEIGHT	100 kg
DIMENSION	94x100x70(h) cm

 G.WEIGHT 115 KG - PACKAGING 109X97X54(H) CM - PALLET 109X97X162(H) CM / Q* 3PCS



GRASSLAND MOWER


OPERATION	double rotor with vertical axis with 8 pivoting blades (4 each)
WORK WIDTH	92 cm
ADJUSTMENTS	cutting height 5 - 7 - 9 cm with fixed positions
TRANSPORT WHEELS	single, quick release
OTHER	• mulching cutting cap • 2 ballasts 4 kg each.
NET WEIGHT	76 kg
DIMENSION	97x117x61(h) cm

 G.WEIGHT 81 KG - PACKAGING 109X97X54(H) CM - PALLET 110X98X162(H) CM / Q* 3PCS



WEED BRUSH

OPERATION	quick-connect brush plate Ø 60 cm
WORK WIDTH	60 cm
ADJUSTMENTS	• work height • lateral $\pm 90^\circ$ • plate inclination 0°-2.5°-5°-7°
TRANSPORT WHEELS	single pivoting
OTHER	5 sets of interchangeable brushes
NET WEIGHT	71 kg
DIMENSION	93x104x62(h) cm

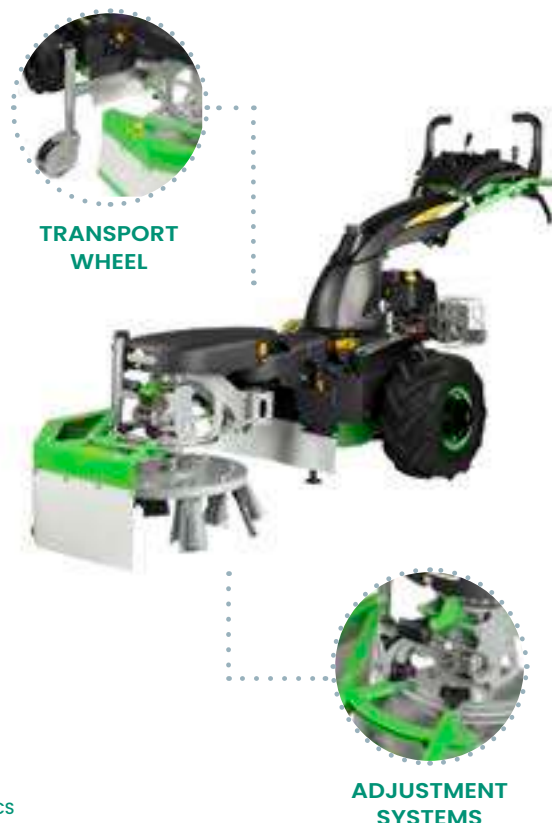

G.WEIGHT 85 KG - **PACKAGING** 109X97X54(H) CM - **PALLET** 110X98X162(H) CM / Q* 3PCS



BRISTLE SET IRON FLAT

plate + flat bristles to be assembled on flange
(not included)



BRISTLE SET IN THICK IRON

8 bundles to be assembled on plate and flange
(not included)



BRISTLE SET PLASTIC

plate + plastic bristles to be assembled on flange
(not included)



BRISTLE SET IN MIXED IRON

4+4 bundles to be assembled on plate and flange
(not included)



BRISTLE SET IN IRON FINE

8 bundles to be assembled on plate and flange
(not included)


4 SEASONS

P130

multi tool

CUTTING BAR

OPERATION	double-blade cutting system ESMww wide bar portal movement
WORK WIDTH	140 cm
ADJUSTMENTS	cutting height via skids 3<->6 cm
TRANSPORT WHEELS	two swivel wheels with quick coupler
OTHER	professional BIDOUX blade change system
NET WEIGHT	88.5 kg
DIMENSION	153x120x53(h) cm

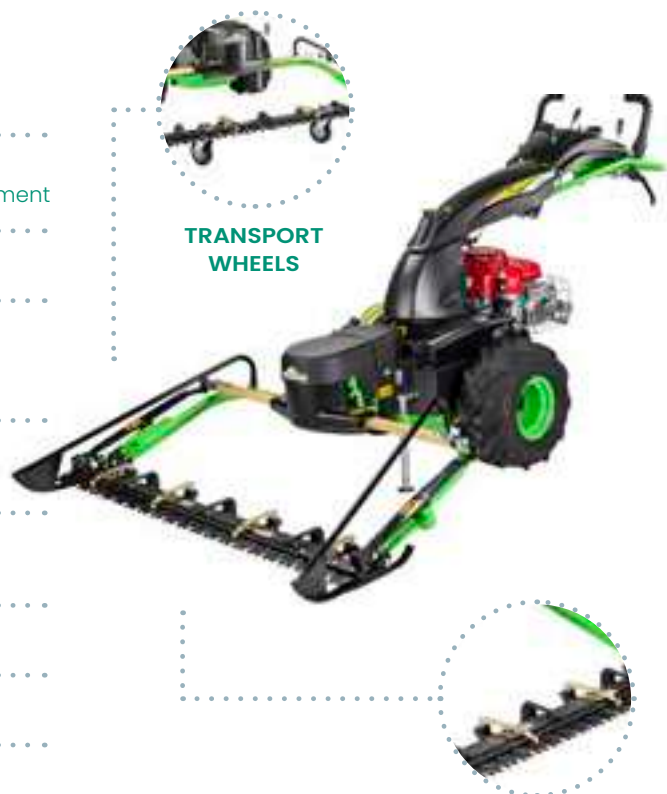

 G.WEIGHT 122 KG - PACKAGING 158X130X43(H) CM - PALLET 158X130X86(H) CM / Q* 2PCS

QUICK-CHANGE BLADE

HAY RAKE

OPERATION	8 combs on belt 2 pairs of tines for combs
WORK WIDTH	120<->155 cm
ADJUSTMENTS	work height via front wheels
TRANSPORT WHEELS	rubber, pivoting
OTHER	hay holder strip for adjustable rake
NET WEIGHT	115 kg
DIMENSION	156x126x102(h) cm



HAY HOLDER
STRIP

ADJUSTABLE SWIVEL
WHEELS


 G.WEIGHT 125 KG - PACKAGING 157X80X102(H) CM - PALLET 152X81X230(H) CM / Q*2PCS

SNOW BLADE

OPERATION	front blade with rubber strip
WORK WIDTH	120 cm
ADJUSTMENTS	- adjustable work height by means of skids - lateral $\pm 30^\circ$
TRANSPORT WHEELS	-
OTHER	shock-proof rubber protection
NET WEIGHT	53 kg
DIMENSION	119x161x134(h) cm



BUMPER STRIP

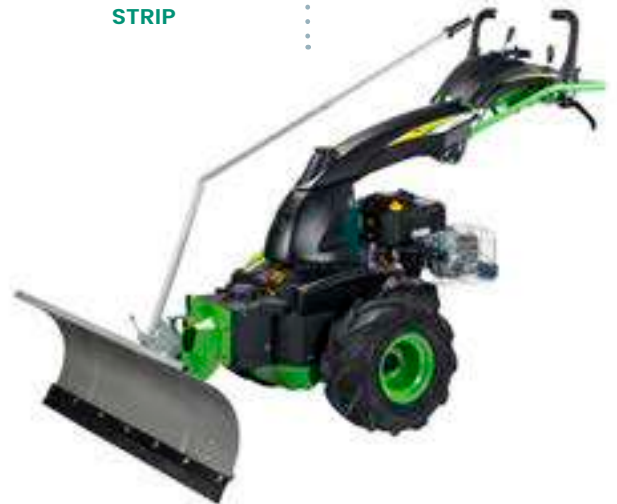

 **G.WEIGHT** 55 KG - **PACKAGING** 120X58X48(H) CM - **PALLET** 110X120X205(H) CM / Q* 8PCS

SNOW THROWER

OPERATION	double stage with rotor $\varnothing$ 40 cm icebreaker rotavators
WORK WIDTH	90 cm
ADJUSTMENTS	- work height 0 - 6 cm - snow deflector 90° cm - adjustable ejection flue
TRANSPORT WHEELS	side slides
OTHER	- control extension rod - flue cleaner pipe
NET WEIGHT	130 kg
DIMENSION	91.5x161x143(h) cm



ICEBREAKER PROPELLERS



ADJUSTMENT LEVERS

 **G.WEIGHT** 162 KG - **PACKAGING** 109X97X54(H) CM - **PALLET** 110X98X162(H) CM / Q* 3PCS

4 SEASONS

P70evo

multi tool

MECHANICAL GEARBOX
belt transmission



RUNNING SPEED

2.1 Km/h 1.1 Km/h		3.5 Km/h 2.5 Km/h 1.1 Km/h
2.1 Km/h 1.1 Km/h		1.1 Km/h

SEMI-PROFESSIONAL



P70evo

	B&S 850 E series	B&S 850 IS series	B&S 1000 Pxi	Euro 224.ohv	Euro R200.ohv
ENGINE	190 cc 3.7 kW Petrol	190 cc 3.7 kW Petrol	223 cc 4.2 kW Petrol	224 cc 4.4 kW Petrol	200 cc 3.5 kW Petrol
STARTER	recoil	electric	recoil	recoil	recoil
HANDLEBAR	reversible, laterally and vertically adjustable				
TRANSMISSION	gears and endless screw in oil bath and belts				
GEARS	machine configuration with front tool: 3 speed forward, 2 speed reverse machine configuration with rear tool: 2 speed forward, reverse				
PTO	vertical with belt				
SLOPE ENGINE	optional kit consisting of ballast and motor coupling system to work laterally on steep terrain (up to 45°)				
STEERING SYSTEM	reversible				
DRIVE WHEELS	tyres, tractor profile with mechanical semi-differential (15x6.00-6")				
NET WEIGHT	55 kg	58 kg	56 kg	58 kg	59 kg
DIMENSIONS	57x135x110(h)				

GR. WEIGHT	61-63 KG
PACKAGING	88X56X61(H) CM
PALLET	90X120X195(H) CM / Q* 6PCS



HANDLEBAR
laterally and
vertically adjustable



LEVERAGES
traction + tool coupling
with integrated safety
system



HANDLEBAR
reversible with new quick
adjustment system



SLOPE ENGINE
kit with ballast for
lateral use on steep
terrain with a maximum
slope of 45°



DRIVEN WHEELS
tractor profile
with mechanical
semi-differential



The slope engine KIT allows, through the
use of a ballast, the addition of a 25°
rotation to the motor which means it
can be used efficiently on steep terrain

Patented system
Ballast 11 KG



AS STANDARD



OPTIONAL



PATENTED

4 SEASONS

P70evo

multi tool

NEW ! BRUSH CUTTER

OPERATION

self-winding head
wire Ø3 mm with 4 outputs
(20-40mm)
capacity: 2 x 7.5m rolls

WORK WIDTH

60 cm

ADJUSTMENTS

- plate inclination 0-6°
- lateral to fixed positions:
0° - 15° - 30° - 45°

TRANSPORT WHEELS

-

OTHER

- handlebar control for wire extension
- protective barriers

NET WEIGHT

23 kg

DIMENSION

86x62x39(h) cm



G.WEIGHT 25 KG

PACKAGING 73X71X42.5(H) CM - PALLET 80X120X225(H) CM / Q* 5PCS



GRASSLAND MOWER

OPERATION

6 pivoting blades on a
vertical cross rotor

WORK WIDTH

63 cm

ADJUSTMENTS

cutting height
5 - 8 cm
with fixed positions

TRANSPORT WHEELS

-

OTHER

-

NET WEIGHT

25 kg

DIMENSION

68x92x48(h) cm



G.WEIGHT 30 KG - PACKAGING 92X69.5X42(H) CM - PALLET 92X70X210(H) CM / Q* 5PCS



CUTTING BAR

OPERATION	double blade movement, two oscillating blades
WORK WIDTH	107 cm
ADJUSTMENTS	cutting height 2<->5.5 cm with skids
TRANSPORT WHEELS	-
OTHER	- grass spreader hood - adjustable skids
NET WEIGHT	23 kg
DIMENSION	111x68x30(h) cm

 **G.WEIGHT** 26 KG - **PACKAGING** 112X38X32(H) CM **PALLET** 110X120X232(H) CM -**Q*** 18PCS



**DOUBLE BLADE
WITH ADJUSTABLE
SKIDS**



ROTAVATOR

OPERATION	16 curved riveted knives
WORK WIDTH	55 cm Ø32 cm
ADJUSTMENTS	work depth 0<->12.5 cm
TRANSPORT WHEELS	-
OTHER	adjustable spur
NET WEIGHT	24 kg
DIMENSION	55x78x58(h) cm

 **G.WEIGHT** 27 KG - **PACKAGING** 67X58X42(H) CM **PALLET** 134X114X180(H) CM -**Q*** 16PCS



**TILLER WITH
16 KNIVES**



ROTARY SCYTHE

OPERATION	4 retractable pivoting blades
WORK WIDTH	64 cm
ADJUSTMENTS	fixed cutting height at 3.6 cm
TRANSPORT WHEELS	-
OTHER	rake kit (accessory)
NET WEIGHT	27 kg
DIMENSION	67x78x49(h) cm

 **G.WEIGHT** 29 KG - **PACKAGING** 70X60X37(H) CM **PALLET** 80X120X197(H) CM -**Q*** 10PCS



**RAKE KIT
(not included)**



4 SEASONS

P70evo

multi tool

TRANSPORT TANK

OPERATION tilting sheet metal tank
load-bearing capacity: 85 lt. - 75 kg

WORK WIDTH -

ADJUSTMENTS -

TRANSPORT WHEELS tyres 20x7.5 cm

OTHER 140-litre tank extension with
quick coupling system
(optional)

NET WEIGHT 23.5 kg

DIMENSION 71x108x86(h) cm

 **G.WEIGHT** 26 KG - **PACKAGING** 88x56x61(H) CM - **PALLET** 90x120x195(H) CM / Q* 6PCS



140L TANK
EXTENSION



TILTING TANK

FLAT TANK

OPERATION flat platform in sheet metal
with tilting plastic tank
load-bearing capacity: 160 l - 75 kg

WORK WIDTH -

ADJUSTMENTS -

TRANSPORT WHEELS tyres 20x7.5 cm

OTHER -

NET WEIGHT 35 kg

DIMENSION 88x155x87(h) cm

 **G.WEIGHT** 38 KG - **PACKAGING** 111x66x71(H) CM - **PALLET** 114x134x225(H) CM / Q* 6PCS



FLAT PLATFORM

HAY RAKE

OPERATION	7-comb belt with double tine
WORK WIDTH	100 cm
ADJUSTMENTS	work height via front wheels
TRANSPORT WHEELS	rubber
OTHER	hay holder strap adjustable
NET WEIGHT	90 kg
DIMENSION	152x218x130(h) cm




HAY HOLDER



G.WEIGHT 113.5 KG - **PACKAGING** 145X80X102(H) CM
- **PALLET** 152X81X204(H) CM - **Q*** 2PCS

DETHATCHER

OPERATION	96 springs on rotor Ø25 cm
WORK WIDTH	60 cm
ADJUSTMENTS	-
TRANSPORT WHEELS	in rubber 20x5 cm
OTHER	-
NET WEIGHT	26 kg
DIMENSION	71x96x39(h) cm



SPRINGS ROTOR



G.WEIGHT 28.5 KG - **PACKAGING** 80X59X57(H) CM
- **PALLET** 80X120X240(H) CM - **Q*** 8PCS

RIDGING PLOW

OPERATION	rear quick coupler
WORK WIDTH	29 cm
ADJUSTMENTS	-
TRANSPORT WHEELS	-
OTHER	-
NET WEIGHT	3 kg
DIMENSION	29x35x48(h) cm



G.WEIGHT 3.7 KG - **PACKAGING** 30X30X20(H) CM
- **PALLET** 90X120X100(H) CM - **Q*** 40PCS

4 SEASONS

P70evo

multi tool

SNOW THROWER

OPERATION turbine with ice breaking propellers double-stage

WORK WIDTH 52 cm

ADJUSTMENTS

- height 2 – 3 cm
- 90° deflector
- 180° ejection flue

TRANSPORT WHEELS –


OTHER

- flue control rod
- flue cleaner pipe

NET WEIGHT 44 kg

DIMENSION 61.5x189x93(h) cm

 **G.WEIGHT** 50 KG – **PACKAGING** 88X56X61(H) CM – **PALLET** 90X120X195(H) CM / Q* 6PCS

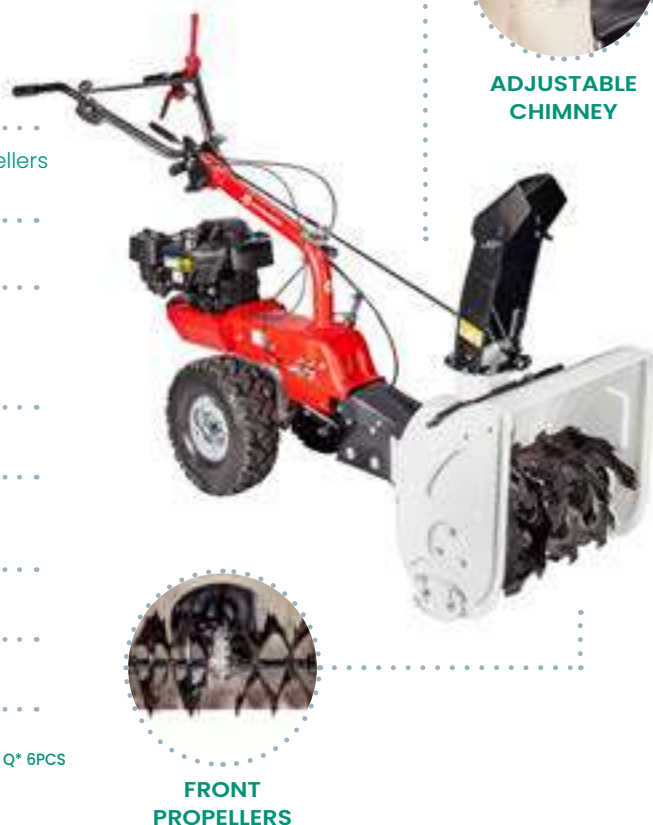

SNOW BLADE

OPERATION adjustable blade with front attachment

WORK WIDTH 85 or 100 cm

ADJUSTMENTS

- height 0-2 cm
- lateral orientation $\pm 30^\circ$

TRANSPORT WHEELS –

OTHER rubber shock-proof strip

NET WEIGHT 20 – 32 kg

DIMENSION 85x126x109 (h) cm
100x126x109(h) cm

 **G.WEIGHT** 22 KG – **PACKAGING** 90X29X45(H) CM – **PALLET** 90X120X192(H) CM / Q* 16PCS

 **G.WEIGHT** 34 KG – **PACKAGING** 101X29X46(H) CM – **PALLET** 90X120X196(H) CM / Q* 12PCS



VACUUM - BLOWER

OPERATION	suction fan + blower pipe
WORK WIDTH	78 cm
ADJUSTMENTS	height 2<-> 6.4 cm
TRANSPORT WHEELS	rubber pivoting
OTHER	185 l removable bag - blower Ø10x250 cm
NET WEIGHT	46.5 kg
DIMENSION	86x149x152(h) cm



G.WEIGHT 52 KG - PACKAGING 120X80X95(H) CM
-PALLET 80X120X190(H) CM -Q* 2PCS

BRUSH

OPERATION	polypropylene brush Ø30 cm
WORK WIDTH	88 cm
ADJUSTMENTS	lateral ±25°
TRANSPORT WHEELS	rubber pivoting
OTHER	removable holders (x2)
NET WEIGHT	44 kg
DIMENSION	79x183x78(h) cm



G.WEIGHT 50 KG - PACKAGING 107X89X52(H) CM
-PALLET 90X120X220(H) CM -Q* 4PCS

ECO SPRAYER

OPERATION	12V 4.1 bar pump batteries (x2) 12V 5A/h
TANK	50 litres
COMPATIBLE LIQUIDS	water, cryoform, fertilisers, pesticides
TRANSPORT WHEELS	tyres 20x7.5 cm
OTHER	- handwashing tank - lance - hose 9 m
NET WEIGHT	41 kg
DIMENSION	71x149x111(h) cm



G.WEIGHT 43 KG - PACKAGING 114X134X71(H) CM
-PALLET 114X134X230(H) CM -Q* 6PCS

4 SEASONS

P55evo

multi tool

MECHANICAL GEARBOX
belt transmission



RUNNING SPEED

1.3 Km/h   2.5 Km/h
1.3 Km/h   2.5 Km/h

AMATEUR



P55evo

ENGINE	Euro 196.ohv 196 cc 3.8 kW Petrol	Euro R200.ohv 200 cc 3.5 kW Petrol	B&S 675 EXi series 163 cc 2.8 kW Petrol	Honda GCV170 166 cc 3.6 kW Petrol	EGOpower+ e-powered 56 V 3.1 kW Electric
--------	---	--	---	---	--

STARTER	recoil	recoil	recoil	recoil	electric
---------	--------	--------	--------	--------	----------

HANDLEBAR	fast adjustment system reversible, laterally and vertically adjustable
-----------	---

TRANSMISSION	gears and endless screw in oil bath and belts
--------------	---

GEARS	forward, reverse
-------	------------------

PTO	vertical with belt
-----	--------------------

SLOPE ENGINE	-
-----------------	---

STEERING SYSTEM	reversible
--------------------	------------

DRIVE WHEELS	tyres, tractor profile (13x5,00-6")
--------------	-------------------------------------

NET WEIGHT	45 kg	41 kg	41 kg	42 kg	44 kg
------------	-------	-------	-------	-------	-------

DIMENSION	55x112x105(h)
-----------	---------------

	GR. WEIGHT 46-49 KG
	PACKAGING 80X59X57(H) CM
	PALLET 80X120X240(H) CM / Q* 8PCS



HANDLEBAR
laterally and
vertically adjustable



HANDLEBAR
reversible with new quick
adjustment system



LEVERAGES
traction + tool coupling
with integrated safety
system



DRIVEN WHEELS
tractor profile
13x5,00-6"



AS STANDARD



OPTIONAL



PATENTED

4 SEASONS

P55evo

multi tool

GRASSLAND MOWER CLASSIC

OPERATION	single blade
WORK WIDTH	53 cm
ADJUSTMENTS	adjustable cutting height at 5-8-10.5 cm
TRANSPORT WHEELS	skids
OTHER	-
NET WEIGHT	22 kg
DIMENSION	61.5x95x35(h) cm

 **G.WEIGHT** 25.5 KG - **PACKAGING** 88X26X63(H) CM - **PALLET** 90X120X252(H) CM / Q* 12CS



CLASSIC MOWING
BLADE



GRASSLAND MOWER PRO

OPERATION	single rotor with 4 pivoting blades
WORK WIDTH	53 cm
ADJUSTMENTS	handlebar with quick adjustment, work height 5-8-10.5 cm
TRANSPORT WHEELS	skids
OTHER	- cutting height adjustment from the handlebar - protective curtains
NET WEIGHT	23.5 kg
DIMENSION	96x61.5x35(h) cm

 **GWEIGHT** 27 KG - **PACKAGING** 93.5X71.5X44.5(H) CM - **PALLET** 92X70X210(H) CM / Q* 5PCS



SINGLE ROTOR
WITH 4 PIVOTING
BLADES



NEW ! GRASSLAND MOWER PRO V2

OPERATION	single rotor with 4 pivoting blades
WORK WIDTH	53 cm
ADJUSTMENTS	handlebar quick adjustment system, work height 5-8-10.5 cm
TRANSPORT WHEELS	couple of front pivoting wheels with blocking system
OTHER	cutting height adjustment from the handlebar
NET WEIGHT	23.5 kg
DIMENSION	96x61.5x35(h) cm

 **GWEIGHT** 27 KG - **PACKAGING** 93.5X71.5X44.5(H) CM - **PALLET** 92X70X210(H) CM / Q* 5PCS



**CUTTING HEIGHT
ADJUSTMENT
LEVER**



**SINGLE ROTOR
WITH 4 PIVOTING
BLADES**



PIVOTING WHEELS

4 SEASONS

P55evo

multi tool

BRUSH CUTTER

OPERATION

self-winding head
wire Ø3 mm with 4 outputs (20-40mm) capacity: 2 x 7.5m rolls

WORK WIDTH

60 cm

ADJUSTMENTS

- deck inclination 0-6°
- side deck at
0° - 15° - 30° - 45°

TRANSPORT WHEELS

-

OTHER

- handlebar control for wire extension
- protective walls

NET WEIGHT

20 kg

DIMENSION

86x62x39(h) cm



G.WEIGHT 23 KG - PACKAGING 73x71x42.5 (H) CM - PALLET 80x120x225 (H) CM / Q* 5PCS



CUTTING BAR

bar Eurosystems or ESM

OPERATION

double blade movement
oscillating lower and upper blade

WORK WIDTH

87 cm

ADJUSTMENTS

cutting height
1,5 <-> 4,7 cm

TRANSPORT WHEELS

-

OTHER

- Eurosystems skids included
- ESM optional skids

NET WEIGHT

Eurosystems 16 kg
ESM 15 kg

DIMENSION

87x60x26 (h) cm
89x39x20 (h) cm



G.WEIGHT 18 KG - PACKAGING 40x88x28 (H) CM - PALLET 90x120x202 (H) CM - Q* 18PCS



ROTAVATOR

OPERATION	rear connection 16 knives
WORK WIDTH	50 cm, Ø26 cm
ADJUSTMENTS	working depth: 0<->6,5 cm
TRANSPORT WHEELS	-
OTHER	adjustable spur
NET WEIGHT	19 kg
DIMENSION	56x48x61(h) cm



G.WEIGHT 21 KG - PACKAGING 52X52X55(H) CM - PALLET 110X120X236(H) CM / Q* 16PCS

ROTARY SCYTHE

OPERATION	4 retractable pivoting blades
WORK WIDTH	57 cm
ADJUSTMENTS	fixed cutting height at 3,2 cm
TRANSPORT WHEELS	-
OTHER	rake kit (optional)
NET WEIGHT	25 kg
DIMENSION	64x76x45(h) cm



G.WEIGHT 27 KG - PACKAGING 70X60X37(H) CM - PALLET 80X120X197(H) CM / Q* 10PCS

4 SEASONS

P55evo

multi tool

BRUSH

OPERATION	horizontal brush Ø30 cm polypropylene
WORK WIDTH	105 cm
ADJUSTMENTS	lateral ±25°
TRANSPORT WHEELS	-
OTHER	-
NET WEIGHT	36 kg
SIZE	104x86x100(h) cm

 G. 40 KG - PACKAGING 108X64X43(H) CM -PALLET 120X80X237(H) CM -Q* 5PCS



SIDE ADJUSTABLE
BRUSH



COLLECTION BRUSH

OPERATION	horizontal brush Ø30 cm polypropylene
WORK WIDTH	88 cm
ADJUSTMENTS	lateral ±25°
TRANSPORT WHEELS	rubber pivoting
OTHER	removable holder
NET WEIGHT	40 kg
SIZE	88x128x101(h) cm

 G.46 KG - PACKAGING 100X87X44(H) CM -PALLET 120X90X240(H) CM -Q* 5PCS



REMOVABLE
HOLDER



TRANSPORT TANK

OPERATION	tilting sheet metal tank load-bearing capacity: 85 lt. - 75 kg
WORK WIDTH	-
ADJUSTMENTS	-
TRANSPORT WHEELS	tyres 20x7.5 cm
OTHER	140-litre tank extension with quick coupling system (optional accessory)
NET WEIGHT	26 kg
SIZE	82x97x35.5 (h) cm

 **G.WEIGHT** 28 KG - **PACKAGING** 88x56x61(H) CM - **PALLET** 90x120x195(H) CM / Q* 6PCS



FLAT TANK

OPERATION	flat platform in sheet metal with tilting plastic tank load-bearing capacity: 160 lt. - 75 kg
WORK WIDTH	-
ADJUSTMENTS	-
TRANSPORT WHEELS	tyres 20x7.5 cm
OTHER	-
NET WEIGHT	34 kg
SIZE	88x155x87(h) cm

 **GROSS WEIGHT** 36 KG - **PACKAGING** 116x53x70(H) CM - **PALLET** 110x120x222(H) CM / Q* 6PCS



4 SEASONS

P55evo

multi tool

SNOW BLADE

OPERATION adjustable blade
with front attachment

WORK WIDTH 85 cm

ADJUSTMENTS

- height 0-2 cm
- lateral $\pm 30^\circ$

TRANSPORT WHEELS -

OTHER shock-proof rubber

NET WEIGHT 18 kg

SIZE 85x93x96(h) cm



G.WEIGHT 20 KG - PACKAGING 88X31X47(H) CM -PALLET 90X120X196(H) CM -Q* 16PCS



SIDE ADJUSTABLE
BLADE



DETHATCHER

OPERATION 96 springs on rotor $\varnothing 25$ cm

WORK WIDTH 60 cm

ADJUSTMENTS -

TRANSPORT WHEELS in rubber 20x5 cm

OTHER -

NET WEIGHT 18 kg

SIZE 62x62x33(h) cm



ROTOR WITH
SPRINGS



GROSS WEIGHT 20 KG - PACKAGING 70X64X37(H) CM -PALLET 80X120X197(H) CM -Q* 10PCS

RIDGING PLOW

OPERATION	rear quick coupler
WORK WIDTH	29 cm
ADJUSTMENTS	-
TRANSPORT WHEELS	-
OTHER	-
NET WEIGHT	3 kg
SIZE	29x35x48(h) cm



G.WEIGHT 3.7 KG - PACKAGING 30X30X20(H) CM -PALLET 90X120X100(H) CM -Q* 40PCS



ECO SPRAYER

OPERATION	12V 4.1 bar pump batteries (x2) 12V 5A/h
TANK	50 litres
COMPATIBLE LIQUIDS	water, cryoform, fertilisers, pesticides
TRANSPORT WHEELS	tyres 20x7.5 cm
OTHER	- handwashing tank - lance - hose 9 m
NET WEIGHT	41 kg
SIZE	71x149x111(h) cm



SPRAYER
LANCE



GROSS WEIGHT 43 KG - PACKAGING 144X66X71(H) CM -PALLET 114X134X230(H) CM -Q* 6PCS

4 SEASONS

Minieffe

multi tool

MECHANICAL REDUCER
belt transmission



RUNNING SPEED



AMATEUR



Minieffe

ENGINE	B&S 450 E series	B&S 625 EXi series	Euro 196.ohv	Euro R200.ohv	Honda GCV170
	125 cc 1.8 kW Petrol	150 cc 2.3 kW Petrol	196 cc 3.8 kW Petrol	200 cc 3.5 kW Petrol	166 cc 3.6 kW Petrol
STARTER	recoil				
HANDLEBAR	vertically adjustable				
TRANSMISSION	endless screw in oil bath and belt				
GEARS	forward gear	forward gear, optional reverse gear	forward gear, optional reverse gear	forward gear, optional reverse gear	forward, reverse gear
PTO	vertical with belt				
SLOPE ENGINE	-				
STEERING SYSTEM	-				
DRIVE WHEELS	tyres, tractor profile 13x5,00-6" (minieffe one-gear) puncture-proof, tractor profile 13x6,00-6" (minieffe reverse)				
NET WEIGHT	36.5 kg	41 kg	42 kg	39 kg	40 kg
DIMENSIONS	65x105x100(h)				

	GR.WEIGHT	40.5-45-44 KG
	PACKAGING	80X59X57(H) CM
	PALLET	80X120X240(H) CM / Q* 8PCS



TOOL LEVER

sheet metal pressure
coupling with integrated
safety system



TRACTION LEVERS

belt forward and reverse
(optional)



HANDLEBAR

laterally adjustable



DRIVIN WHEELS

tractor profile
ver. mono - 13x5,00-6"
ver. reverse - 13x6,00-6"



AS STANDARD



OPTIONAL



PATENTED

4 SEASONS

Minieffe

multi tool

GRASSLAND MOWER CLASSIC

*cannot be used with B&S450 engine

OPERATION	mowing single blade
WORK WIDTH	53 cm
ADJUSTMENTS	cutting height 5-8-10.5 cm
TRANSPORT WHEELS	skids
OTHER	-
PNET	22 kg
DIMENSION	61.5x95x35(h) cm

 **PLOR** 25.5 KG - **IMBALLO** 88X26X63(H) CM - **PALLET** 90X120X252(H) CM / Q* 12PZ



GRASSLAND MOWER PRO

*cannot be used with B&S450 engine

OPERATION	4 floating knives
WORK WIDTH	53 cm
ADJUSTMENTS	cutting height 5-8-10.5 cm
TRANSPORT WHEELS	skids
OTHER	cutting height adjustment on the handlebar
PNET	25 kg
DIMENSION	96x61.5x35(h) cm

 **G.WEIGHT** 27 KG - **PACKAGING** 93.5X71.5X44.5(H) CM - **PALLET** 92X70X210(H) CM /



NEW! GRASSLAND MOWER PRO V2

*cannot be used with B&S450 engine

OPERATION	4 floating knives
WORK WIDTH	53 cm
ADJUSTMENTS	cutting height 5-8-10.5 cm
TRANSPORT WHEELS	front pivoting wheels with blocking system
OTHER	cutting height adjustment on the handlebar
PNET	25 kg
DIMENSION	96x61.5x35(h) cm

 **G.WEIGHT** 27 KG - **PACKAGING** 93.5X71.5X44.5(H) CM - **PALLET** 92X70X210(H) CM /



BRUSH CUTTER

*cannot be used with engine B&S450

OPERATION self-winding head
wire Ø3 mm with 4 outputs (20-35mm)
capacity: 2 x 7m rolls

WORK WIDTH 60 cm

ADJUSTMENTS

- plate inclination 0-6°
- lateral to fixed positions:
0° - 15° - 30° - 45°

TRANSPORT WHEELS -

OTHER

- handlebar control for wire extension
- protective walls

NET WEIGHT 23 kg

DIMENSION 86x62x39(h) cm

 **G. WEIGHT** 26 KG - **PACKAGING** 73X71X42(H) CM - **PALLET** 80X120X225(H) CM / Q* 5PCS



CUTTING BAR

OPERATION

-  single-blade movement
fixed lower blade
oscillating upper blade

WORK WIDTH 87 cm

ADJUSTMENTS -

TRANSPORT WHEELS -

OTHER self-greasing head

NET WEIGHT 18 kg

DIMENSION 53x93x30(h) cm

 **G. WEIGHT** 18 KG - **PACKAGING** 40X88X28(H) CM - **PALLET** 90X120X202(H) CM - Q* 18PCS



4 SEASONS

Minieffe

multi tool

ROTARY SCYTHE

*cannot be used with B&S450 engine

OPERATION 4 retractable pivoting blades

WORK WIDTH 57 cm

ADJUSTMENTS fixed cutting height at 3.2 cm

TRANSPORT WHEELS -

OTHER rake kit (optional)

NET WEIGHT 25 kg

DIMENSION 76x64x45(h) cm



**RAKE KIT
(OPTIONAL)**



 **G. WEIGHT 27 KG - PACKAGING 70X60X37(H) CM - PALLET 80X120X197(H) CM / Q* 10PCS**

SNOW BLADE

OPERATION adjustable blade with front attachment

WORK WIDTH 85 cm

ADJUSTMENTS

- height 0-2 cm
- lateral $\pm 30^\circ$

TRANSPORT WHEELS -

OTHER shock-proof rubber

NET WEIGHT 18 kg

DIMENSION 85x93x96(h) cm



**SIDE ADJUSTABLE
BLADE**



 **G. WEIGHT 20 KG - PACKAGING 88X31X47(H) CM - PALLET 90X120X196(H) CM - Q* 16PCS**

BRUSH

OPERATION	horizontal brush Ø30 cm polypropylene
WORK WIDTH	105 cm
ADJUSTMENTS	lateral ±25°
TRANSPORT WHEELS	-
OTHER	-
NET WEIGHT	36 kg
DIMENSION	86x105x100(h) cm



**SIDE ADJUSTABLE
BRUSH**



G. WEIGHT 40 KG - **PACKAGING** 108X64X43(H) CM - **PALLET** 120X80X237(H) CM - **Q*** 5PCS

COLLECTION BRUSH

OPERATION	horizontal brush Ø30 cm polypropylene
WORK WIDTH	88 cm
ADJUSTMENTS	lateral ±25°
TRANSPORT WHEELS	rubber pivoting
OTHER	removable holder
NET WEIGHT	40 kg
DIMENSION	128x87x101(h) cm



**REMOVABLE
HOLDER**



G. WEIGHT 46 KG - **PACKAGING** 100X87X44(H) CM - **PALLET** 120X90X240(H) CM - **Q*** 5PCS



HAYMAKING

Scythe mowers and rotary scythes

The art of mowing.

Haymaking is an art that calls for time, experience, patience and precision. Eurosystems has been committed to designing and building high quality grass cutting equipment for over 50 years to guarantee its customers a practical, efficient and robust machine.

Eurosystems' lengthy experience, its many qualitative tests and checks and its use of professional solutions for hobby and semi professional uses make Eurosystems mowers work tools extremely reliable and durable, ideal for small and medium-sized plots of land.

What are the benefits?

1

We are European category leaders, we produce amateur and semi-professional mowers with the best value for money on the market

2

We minimise waste: we design our machines to last over time and to be repaired at low costs even after 20 years

3

We adapt professional cutting solutions to amateur machines offering the highest work performance in the category

NEW! M310

schyte mower

MECHANICAL REDUCER
belt transmission**RUNNING SPEED**

3.0 Km/h

SEMI-PROFESSIONAL**M310**

	M310	
ENGINE	Euro 196.ohv 196 cc 3.8 kW Petrol	Euro R200.ohv 200 cc 3.5 kW Petrol
STARTER	recoil	recoil
HANDLEBAR	laterally and vertically adjustable	
TRANSMISSION	endless screw in oil bath and belt	
CUTTING SYSTEM	double blade movement - oscillating upper and lower blade mowing bar: Eurosystems cutting width 127 cm	
OTHER	Eurosystems cutting bar with skids, cutting 3 cm	
DRIVE WHEELS	tyres, tractor profile with mechanical semi-differential (15x6.00-6")	
NET WEIGHT	69 kg	65 kg
DIMENSIONS	131x159x90(h) cm	

**GR.WEIGHT** 73-69 KG**PACKAGING** 80X59X57(H) CM**PALLET** 80X120X240(H) CM / Q* 8PCS



HANDLEBAR
vertically and laterally
adjustable



BI-LAMA MOVEMENT
two oscillating cutting
blades 127 cm



LEVERAGES
traction + tool coupling
with integrated safety
system



DRIVEN WHEELS
tractor profile with
mechanical
semi-differential
15x6.00-6"



SNOW BLADE
85 cm
adjustable $\pm 30^\circ$



AS STANDARD



OPTIONAL



PATENTED

HAYMAKING

M210

scythe mower

MECHANICAL REDUCER
belt transmission



RUNNING SPEED



2.6 Km/h

AMATEUR



M210

ENGINE	B&S 450 E 125 cc 1.8 kW Petrol	B&S 625 EXi 150 cc 2.3 kW Petrol	Euro 139.ohv 139 cc 2.7 kW Petrol	Euro R170.ohv 173 cc 3.2 kW Petrol	Honda GCV170 166 cc 3.6 kW Petrol	EGOpower+ e-powered 56 V 3.1 kW Electric
STARTER	recoil	recoil	recoil	recoil	recoil	electric
HANDLEBAR	laterally and vertically adjustable					
TRANSMISSION	endless screw in oil bath and belt					
CUTTING SYSTEM	double blade movement - oscillating upper and lower blade mowing bar: Eurosystems or ESM cutting width 87 cm					
OTHER	Eurosystems cutting bar with adjustable skids, adjustable cutting height 1.5 <-> 4.7 cm ESM cutting bar with optional adjustable skids, adjustable cutting height 1.5 <-> 4.7 cm					
DRIVE WHEELS	puncture proof, tractor profile 13x5.00-6"					
NET WEIGHT	50.5 kg	51 kg	50.5 kg	51.5 kg	51 kg	54 kg
DIMENSIONS	87x157x90(h) cm					



GR.WEIGHT 54.5-59 KG

PACKAGING 80X59X57(H) CM

PALLET 80X120X240(H) CM / Q* 8PCS



HANDLEBAR
vertically and laterally
adjustable



LEVERAGES
traction + tool coupling
with integrated safety
system



DRIVEN WHEELS
puncture proof
13x5.00-6"



BI-LAMA MOVEMENT
two oscillating cutting
blades 87 cm



SNOW BLADE
85 cm
adjustable $\pm 30^\circ$



AS STANDARD



OPTIONAL



PATENTED

HAYMAKING

M90

scythe mower

MECHANICAL REDUCER
belt transmission



RUNNING SPEED



AMATEUR



M90

NEW!

	B&S 450 E series	Euro 123.ohv	B&S 625 EXi series	Euro R145.ohv
ENGINE	125 cc 1.8 kW Petrol	123 cc 2.2 kW Petrol	150 cc 2.3 kW Petrol	145 cc 2.5 kW Petrol
STARTER	recoil			
HANDLEBAR	vertically adjustable			
TRANSMISSION	endless screw in oil bath and belt			
CUTTING SYSTEM	 single blade movement: fixed lower blade, oscillating upper blade cutting width 87 cm cutting height 2.0 cm			
OTHER	-			
DRIVE WHEELS	puncture proof, tractor profile 13x5.00-6"			
NET WEIGHT	48.5 kg	48.5 kg	49 kg	49 kg
DIMENSIONS	93x138x104(h) cm			



GR.WEIGHT 51.5-52.5 KG

PACKAGING 80X59X57(H) CM

PALLET 80X120X240(H) CM / Q* 8PCS



SINGLE-BLADE MOVEMENT

upper oscillating blade,
cut 87 cm



LEVERAGES

traction + tool coupling
with integrated safety
system



ADJUSTABLE HANDLEBAR

vertically



GRASS SPREADER HOOD

oscillating, patented



SNOW BLADE

85 cm
adjustable $\pm 30^\circ$



AS STANDARD



OPTIONAL



PATENTED

HAYMAKING

Rs210

rotary scythe

MECHANICAL REDUCER
belt transmission



RUNNING SPEED



AMATEUR



Rs210

ENGINE	B&S 675 EXi series	Euro R200.ohv	Euro 196.ohv
	163 cc 2.8 kW Petrol	200 cc 3.5 kW Petrol	196 cc 3.8 kW Petrol
STARTER	recoil		
HANDLEBAR	laterally and vertically adjustable		
TRANSMISSION	endless screw in oil bath and belt		
CUTTING SYSTEM	rotary disc with vertical axis Ø64 cm with 4 retractable blades fixed cutting height 3.2 cm		
OTHER	rake kit (optional)		
DRIVE WHEELS	puncture proof, tractor profile 13x5.00-6"		
NET WEIGHT	65 kg	66 kg	66 kg
DIMENSIONS	67x164x107(h) cm		



GR.WEIGHT 69-68 KG

PACKAGING MACHINE 80X59X57(H) CM ROTARY DISC 70X60X37(H) CM

PALLET MACHINE 80X120X240(H) CM / Q* 8PZ ROTARY DISC 80X120X164(H) CM / Q* 8PCS



HANDLEBAR
vertically and laterally
adjustable



LEVERAGES
traction + tool coupling
with integrated safety
system



ROTARY DISC
4 retractable blades
cutting width 64 cm



RAKE KIT
strip with side sheet for
windrow creation



SNOW BLADE
85 cm
adjustable $\pm 30^\circ$



AS STANDARD



OPTIONAL



PATENTED

HAYMAKING

Rs90

rotary scythe

MECHANICAL REDUCER
belt transmission



RUNNING SPEED



AMATEUR



Rs90

ENGINE	B&S	Euro	
	575 Ex series	139.ohv	Euro R170.ohv
	140 cc	139 cc	173 cc
	2.3 kW	2.7 kW	3.2 kW
	Petrol	Petrol	Petrol
STARTER	recoil		
HANDLEBAR	vertically adjustable		
TRANSMISSION	endless screw in oil bath and belt		
CUTTING SYSTEM	rotary disc with vertical axis Ø57 cm with 4 retracted blades fixed cutting height 3.2 cm		
OTHER	rake kit (optional)		
DRIVE WHEELS	puncture proof, tractor profile 13x5.00-6"		
NET WEIGHT	62.5 kg	63 kg	63 kg
DIMENSIONS	64x162x107(h) cm		

	G.WEIGHT	66 KG
	PACKAGING	MACHINE 80X59X57(H) CM ROTARY DISC 70X60X37(H) CM
	PALLET	MACHINE 80X120X240(H) CM / Q* 8PCS ROTARY DISC 80X120X164(H) CM / Q* 8PCS



HANDLEBAR
vertically adjustable



LEVERAGES
traction + tool coupling
with integrated safety
system



ROTARY DISC
4 retractable blades
cutting width 57 cm



RAKE KIT
strip with side sheet for
windrow creation



SNOW BLADE
85 cm
adjustable $\pm 30^\circ$



AS STANDARD



OPTIONAL



PATENTED



ARTIFICIAL LAWN

Decompactor and motor brushes

Synthetically... perfect!

Less care required and less wastage of water resources: these are just some of the reasons that have led synthetic grass pitches to be used more and more frequently, both for domestic and for sports use.

However, this does not mean that these pitches do not require periodic maintenance and cleaning operations.

Eurosystems has developed a complete range of products that allow the lawn to last for a long time while optimally maintaining its physical-technical characteristics.

What are the benefits?

1

A complete range to perform the necessary maintenance in small and medium-sized domestic or sports fields

2

Products developed in collaboration with professional maintenance technicians and installers in order to obtain certified results

3

Correct cleaning and maintenance of synthetic grass lawns extend their useful life and maintain their physical-technical characteristics over time

Deco90

decompactor

MECHANICAL GEARBOX
belt transmission

RUNNING SPEED

2.1 Km/h 1.1 Km/h 3.5 Km/h 2.5 Km/h 1.1 Km/h

SEMI-PROFESSIONAL


Deco90

ENGINE	Briggs&Stratton 1000 Pxi 223 cc 4.3 kW Petrol
STARTER	recoil
HANDLEBAR	laterally and vertically adjustable
TRANSMISSION	gears and endless screw in oil bath and belts
WORKING SYSTEM	rotor 80 cm with 156 springs, 142 rpm brushes (x2) 90 cm dione oscillating one fixed, polypropylene bristles 95 mm independent engagement levers for rotor and brush
ADJUSTMENTS	spring rotor work depth 0 <-> 5 cm brush height precision adjustment 0 <-> 1 cm
DRIVE WHEELS	tyres, tractor profile with mechanical semi-differential (15x6.00-6")
OTHER	4 swivel wheels Ø17.5 cm limit stops for transport optional kit with 11 kg front ballast system
NET WEIGHT	143 kg
DIMENSIONS	105x168x95(h) cm


GR.WEIGHT 172.5 KG

PACKAGING 168X105X96(H) CM

PALLET 168X105X192 (H) CM / Q* 2PCS



PIVOTING WHEELS (x4)
with limit stop for
transport



TOOL COUPLING LEVER
sheet metal pressure with
integrated safety system



ROTOR COUPLING LEVER
with management of work
depth levels



SPRING ROTOR
independent activation
80 cm - 142 rpm



BRUSHES (x2)
of which oscillating front
with independent coupling
and work depth adjustment
controls



AS STANDARD




OPTIONAL



PATENTED

Sweepy

motor brush

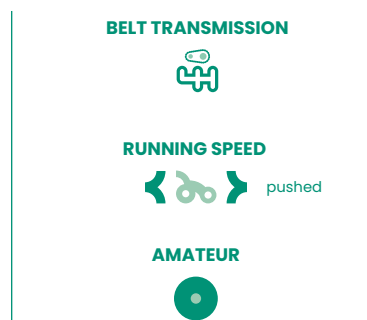

Sweepy

ENGINE	B&S 675 Exi series 163 cc 2.8 kW Petrol	Euro R170.ohv 173 cc 3.2 kW Petrol	Euro 196.ohv 196 cc 3.8 kW Petrol	Honda GCVx170 166 cc 3.6 kW Petrol	EGOpower+ e-powered 56 V 3,1 kW Electric
STARTER	recoil	recoil	recoil	recoil	electric
TRANSMISSION	v-belt				
ROTOR	nylon helical brush Ø16 cm work width 36 cm, adjustable work depth 0 <-> 2 cm rotation speed 2.600 rpm				
OTHER	45 lt collection bag				
DRIVE WHEELS	Ø20 cm non-driven self-cleaning solid rubber wheels with ball bearings				
NET WEIGHT	34 kg	34 kg	35.5 kg	34 kg	36 kg
DIMENSIONS	56x121x100(h) cm				



GR.WEIGHT	38-40 KG
PACKAGING	80X59X57(H) CM
PALLET	80X120X240(H) CM / Q* 8PCS



COLLECTION BAG
nylon removable
capacity 45 l



TOOL COUPLING LEVER
sheet metal pressure with
integrated safety system



SELF-CLEANING WHEELS
Ø20 cm
with ball bearings



ADJUSTMENT LEVER
spring rotor work depth



HELICAL BRUSH
in nylon 36 cm
2,600 rpm




AS STANDARD



OPTIONAL



PATENTED

Euro
E900

ENGINE	1500 900 W 230 V 50 Hz Electric
STARTER	electric
HANDLEBAR	adjustable into double pre-set positions
TRANSMISSION	endless screw
BRUSH	polypropylene brush Ø28 cm work width 60 cm rotation speed 150 rpm direction of rotation: towards the operator
OTHER	-
WHEELS	-
NET WEIGHT	18 kg
DIMENSIONS	68x112x107(h) cm



GR.WEIGHT	21 KG
PACKAGING	80X59X57(H) CM
PALLET	80X120X240(H) CM / Q* 8PCS



HANDLEBAR

adjustable in two pre-set positions



STARTER

electrician with quick-release safety system



BRUSH

in polypropylene
Ø28 cm, width 60 cm



AS STANDARD




OPTIONAL



PATENTED

NEW! Tpm42

de-thatcher

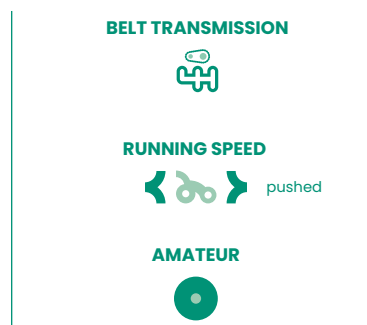

Tpm42

ENGINE	Euro	Honda
	196.ohv 196 cc 3.8 kW Petrol	GCVx170 166 cc 3.6 kW Petrol

STARTER	recoil	recoil
----------------	--------	--------

TRANSMISSION	v-belt
---------------------	--------

ROTOR	rotor with 56 springs work width 38 cm, adjustable work depth 0 <-> 2 cm rotation speed 2.600 rpm
--------------	---

OTHER	45 lt collection bag
--------------	----------------------

DRIVE WHEELS	Ø20 cm non-driven self-cleaning solid rubber wheels with ball bearings
---------------------	--

NET WEIGHT	35 kg	34 kg
-------------------	-------	-------

DIMENSIONS	56x121x100(h) cm
-------------------	------------------



GR.WEIGHT	39-38 KG
PACKAGING	80X59X57(H) CM
PALLET	80X120X240(H) CM / Q* 8PCS



COLLECTION BAG
nylon removable
capacity 45 l



TOOL COUPLING LEVER
sheet metal pressure with
integrated safety system



SELF-CLEANING WHEELS
Ø20 cm
with ball bearings



ADJUSTMENT LEVER
spring rotor work depth



DE-THATCHER
56 springs
INOX



AS STANDARD



OPTIONAL



PATENTED



LAWN

Ride on mowers and scarifier

A professionally prepared lawn

A line of products dedicated to lawn care composed by ride on mowers and scarifier.

The Eurosystems ride on mowers offer comfortable seating, certified safety systems and various cutting options, from mulching to collecting cut. The Sc42 scarifier makes maneuverability and ease of use its main features.

The Sc42 scarifier can now be supplied also with battery engine EGO power + 56V.

What are the benefits?

1

One of the last Italian lawn mowers on the market which means a short production chain and for the most part local as well as lower consumption and pollution

2

Efficient and responsive after-sales service through a widespread network across the territory which means there is always a fast service and spare parts are always available even in high season

3

Safe, simple and intuitive, both during use and during adjustment and/or maintenance. All the models are certified and comply with the European safety regulations

Slalom

ride on mower

HYDROSTATIC GEARBOX
hydrostatic transmission + belt



RUNNING SPEED

0-3 km/h



0-8 km/h

SEMI-PROFESSIONAL



	Slalom 67		Slalom 76		Slalom 82	
ENGINE	Euro	B&S	Euro	B&S	Euro	B&S
	352.ohv	3105PB	352.ohv	3125PB	352.ohv	3125PB
	352 cc	344 cc	352 cc	344 cc	352 cc	344 cc
	7.2 kW	7.7 kW	7.2 kW	9.2 kW	7.2 kW	9.2 kW
	Petrol	Petrol	Petrol	Petrol	Petrol	Petrol
STARTER	electric		electric		electric	
TRANSMISSION	rear hydrostatic with differential		rear hydrostatic with differential		rear hydrostatic with differential	
DECK	collection blade cutting width 67 cm cutting height 4-10 cm		collection blade cutting width 76 cm cutting height 4-8.5 cm		recycler blade with removable mulching cap cutting width 80 cm cutting height 4-8.5 cm	
OTHER	150 lt collection bag		150 lt collection bag		150 lt collection bag	
DRIVE WHEELS	rear tyres 15x6.00-6" front anti-puncture 11x4.00-4"		rear tyres 15x6.00-6" front anti-puncture 11x4.00-4"		rear tyres 15x6.00-6" front anti-puncture 11x4.00-4"	
NET WEIGHT	143 kg		143 kg		165 kg	
DIMENSIONS	82x195x104(h) cm		84x195x104(h) cm		88x195x104(h) cm	

	GR.WEIGHT	150 KG
	PACKAGING	151X84X86(H) CM
	PALLET	151X84X172(H) CM / Q* 2PCS



STARTER
electrical, via key with 3
safety positions



COLLECTION BAG
with lever discharge
capacity 150 l



COLLECTION BLADE
cut 67 or 76 cm
*standard for Slalom 67
and 76



LAMA RECYCLER
lama recycler
*standard for Slalom82



ADJUSTMENT LEVERS
cutting height and
advancement speed



DEFLECTOR
for cutting without
collection



MULCHING KIT
recycler blade + cap
*only for Slalom76



AS STANDARD



OPTIONAL



PATENTED

Asso

ride on mower

MECHANICAL GEARBOX mechanical transmission + belt



RUNNING SPEED

3.0 km/h

7.7 km/h
6.0 km/h
4.0 km/h
2.5 km/h
1.9 km/h

AMATEUR



Asso 67

ENGINE	Euro	B&S
	352.ohv	3105PB
	352 cc	344 cc
	7.2 kW	7.7 kW
	Petrol	Petrol
STARTER	electric	
TRANSMISSION	rear mechanical with differential	
DECK	collection blade cutting width 67 cm cutting height 4-10 cm	
OTHER	150 lt collection bag	
DRIVE WHEELS	rear tyres 15x6.00-6" front anti-puncture 11x4.00-4"	
NET WEIGHT	143 kg	
DIMENSIONS	82x195x104(h) cm	

Asso 76

ENGINE	Euro	B&S
	352.ohv	3125PB
	352 cc	344 cc
	7.2 kW	9.2 kW
	Petrol	Petrol
STARTER	electric	
TRANSMISSION	rear mechanical with differential	
DECK	collection blade cutting width 76 cm cutting height 4-8.5 cm	
OTHER	150 lt collection bag	
DRIVE WHEELS	rear tyres 15x6.00-6" front anti-puncture 11x4.00-4"	
NET WEIGHT	143 kg	
DIMENSIONS	84x195x104(h) cm	



GR.WEIGHT	150 KG
PACKAGING	151X84X86(H) CM
PALLET	151X84X172(H) CM / Q* 2PCS



STARTER
electrical, via key with 3
safety positions



COLLECTION BAG
with lever discharge
capacity 150 l



ADJUSTMENT LEVERS
cutting height and
advancement speed



COLLECTION BLADE
cut 67 or 76 cm



DEFLECTOR
for cutting without
collection



MULCHING KIT
recycler blade
+ plate cap
**only for Asso76*



AS STANDARD



OPTIONAL



PATENTED

LAWN

Sc42

NEW! Sc42F

de-thatchers

BELT TRANSMISSION



RUNNING SPEED



AMATEUR



Sc42			Sc42 F		
ENGINE	Euro R145.ohv 145 cc 2.5 kW Benzina	Honda GCVx170 166 cc 3.6 kW Benzina	EGOpower+ e-powered 56 V 3,1 kW Elettrico	B&S 450 E series 125 cc 1.8 kW Benzina	Euro 123.ohv 123 cc 2.2 kW Benzina
STARTER	recoil	recoil	electric	recoil	recoil
TRANSMISSION	v-belt				
ROTORS	Sc42 fix knives working width 40 cm adjustable working depth 0 <-> 2 cm rotor speed rotation 3.200 rpm			Sc42: fix knives Sc42F: floating knives working width 40 cm adjustable working depth 0 <-> 2 cm rotor speed rotation 3.200 rpm	
OTHER	collecting bag 45 lt (optional)				
DRIVE WHEELS	Ø20 cm non-driven self-cleaning solid rubber wheels with ball bearings				
NET WEIGHT	32.5 kg	32.5 kg	34 kg	32.5 kg	33 kg
DIMENSIONS	56x121x100(h) cm				

note: Sc42 is commercialized with all the engines, Sc42F only with B&S 450 and Euro 123OHV

	GR.WEIGHT	36.5-38KG
	PACKAGING	80X59X57(H) CM
	PALLET	80X120X240(H) CM / Q* 8PCS



ROTOR
15 pairs of fixed type
knives
*on mod. Sc42



TOOL COUPLING LEVER
with integrated quick-
release safety system



ADJUSTMENT LEVER
spring rotor work depth



FLOATING KNIVES
18 knives
*on mod. SC42F



COLLECTING BAG
nylon, removable
capacity 45 lt



AS STANDARD



OPTIONAL



PATENTED



GARDEN

Wheel barrow & moto sprayer

Effortless gardeners

We design and build simple but robust machines that make physically strenuous work easier:

The Eurosystems motor wheelbarrows are designed to transport heavy and bulky objects. The battery-powered also means it can be used in closed environments such as greenhouses and warehouses.

The Eurosystems motosprayers are instead designed for the selective spraying of orchards, vineyards and vegetable gardens; the possibility of using different types of liquids allows these tools to be extremely useful and versatile.

What are the benefits?

1

Manoeuvrability and steering comfort thanks to the technical solutions designed and adopted to facilitate the use and steering of our machinery

2

Reduction of physical effort in gardening activities considered tiring which translates into the work being more pleasant and accessible to all

3

Our models are designed to last over time and can be easily repaired even many years after purchase

Carry

wheel barrow

MECHANICAL REDUCER belt transmission



RUNNING SPEED



AMATEUR



Carry					NEW!		Carry BATTERY	
ENGINE	B&S 450 E series	Euro 123.ohv	Honda GCVx170	Euro R.145	Euro R.145 145 cc 2.5 kW Benzina		Euro Battery	EGOpower+ e-powered
	125 cc	123 cc	166 cc	145 cc			24 V	56 V
	1.8 kW	2.2 kW	3.6 kW	2.5 kW			300 W	3.1 kW
	Petrol	Petrol	Petrol	Benzina			Electric	Electric
STARTER	recoil						electric	
TRANSMISSION	endless screw in oil bath and belts 1 forward gear, reverse gear						endless screw in oil bath and belts 1 forward gear, reverse gear	
TANK	tilting galvanised sheet metal tank max. capacity 85 lt. max. load-bearing capacity 100 kg						tilting galvanised sheet metal tank max. capacity 85 lt. max. load-bearing capacity 100 kg	
OTHER	-						2 lead batteries 12V 5Ah each	optional lithium batteries
DRIVE WHEELS	tractor profile front tyres 13x5.00-6" with mechanical semi-differential						tractor profile front tyres 13x5.00-6" with mechanical semi-differential	
NET WEIGHT	57 kg	60 kg	60 kg	58 kg			93 kg	61 kg
DIMENSIONS	65x145x100(h) cm						65x145x100(h) cm	

	GR.WEIGHT	62-64 KG
	PACKAGING	110X65X70(H) CM
	PALLET	114X134X225(H) CM / Q* 6PCS

99-66 KG
110X65X70(H) CM
130X114X155(H) CM / Q* 4PCS



DRIVE WHEELS
tractor profile with
mechanical semi-
differential



TILTING TANK
through lever on the
handlebar handle



REAR WHEELS
pivoting on floating axle



TANK EXTENSION
140 l capacity
fast coupling



FLAT TANK
capacity 160 l
+ sheet metal
platform



SNOW BLADE
85 cm, adjustable
laterally $\pm 30^\circ$



REAR WHEELS
pneumatics



AS STANDARD



OPTIONAL



PATENTED

Carry Sprayer

motosprayer

MECHANICAL REDUCER
belt transmission



RUNNING SPEED

2.0 km/h  3.6 km/h

SEMI-PROFESSIONAL



Carry Sprayer

ENGINE	B&S 675 EXI series 163 cc 2.8 kW Petrol	Euro R.170 173 cc 3.2 kW Petrol
STARTER	recoil	
TRANSMISSION	endless screw in oil bath and belts 1 forward gear, reverse gear	
WORK SYSTEM	diaphragm pump pressure 30 bar, maximum delivery 29 lt/min sprayer lance with atomizer 25m hose with crank winder 120 lt tank with filter	
OTHER	10 lt handwashing tank	
DRIVE WHEELS	tyres, tractor profile 13x5.00-6" with mechanical semi-differential	
NET WEIGHT	94.5 kg	94 kg
DIMENSIONS	74x131x112(h) cm	

	GR.WEIGHT	118-119 KG
	PACKAGING	145X80X102(H) CM
	PALLET	151X82X233(H) CM / Q* 6PCS



TANK

capacity 120 lt. with filter
+ handwashing tank 10 lt



25 M HOSE

with crank hose reel
holder



PUMP

pressure 30 bar
delivery 29 l/min



DRIVEN WHEELS

tractor profile with
mechanical semi-
differential



LANCIA

with pressure atomizer



AS STANDARD



OPTIONAL



PATENTED

Eco Sprayer

motosprayer

RUNNING SPEED



pushed

AMATEUR



Eco Sprayer

ENGINE -

STARTER -

TRANSMISSION -

WORK SYSTEM diaphragm pump SBR pressure 4.1 bar, maximum delivery 7.7 lt/min
 sprayer lance with pressure sprayer
 9m hose with hose reel support
 50 lt tank


OTHER batteries (x2) 12 V 5Ah
 10 lt handwashing tank
 front fan sprayer with 2 interchangeable nozzles
 manual parking brake

WHEELS rear steering wheel, fixed front wheels

NET WEIGHT 38 kg

DIMENSIONS 60x115x113(h) cm

 **GR.WEIGHT** 40 KG
PACKAGING 110X65X71(H) CM
PALLET 114X134X225(H) CM / Q* 6PCS

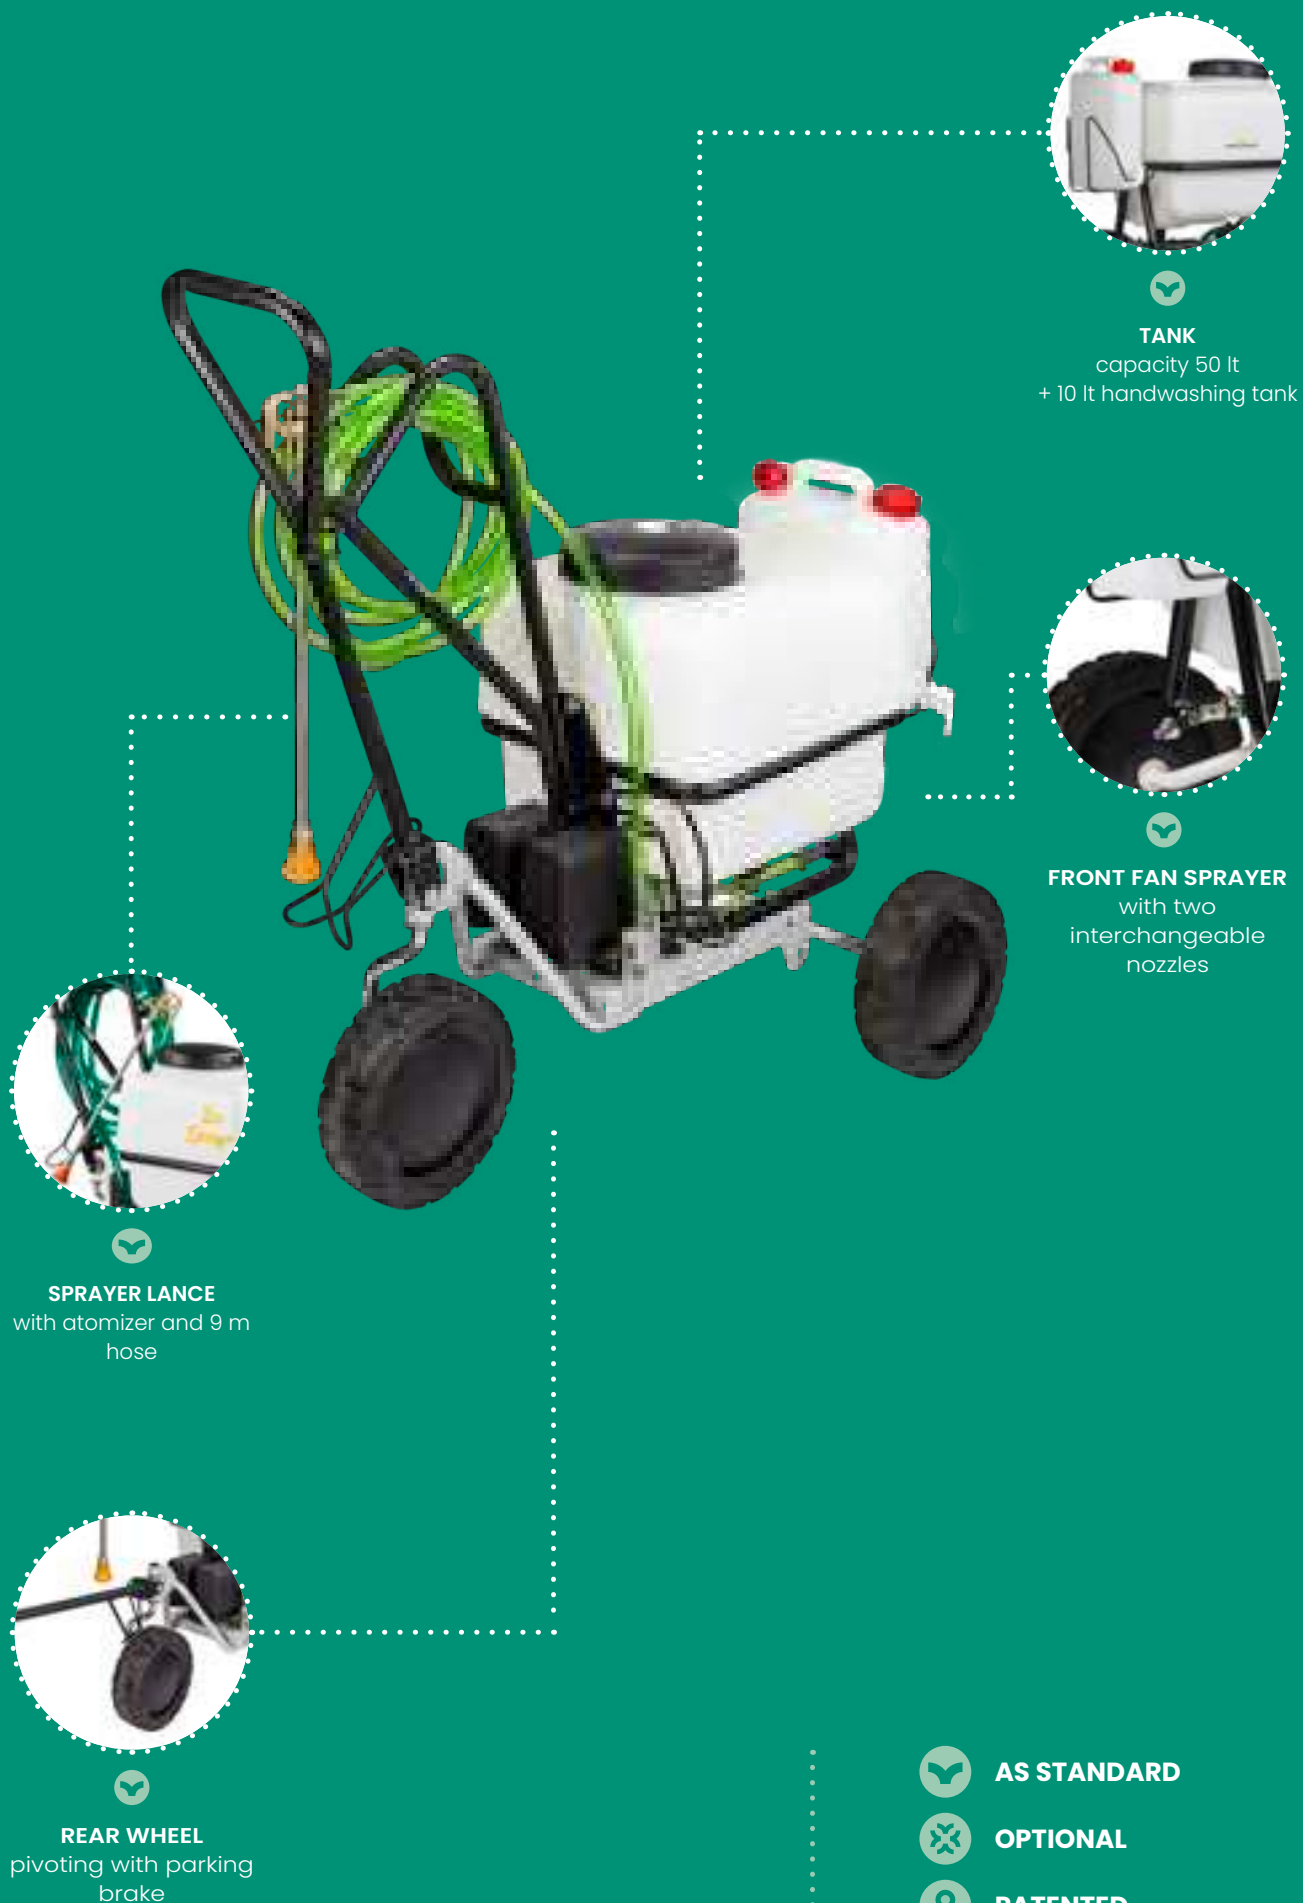

TANK
capacity 50 lt
+ 10 lt handwashing tank



FRONT FAN SPRAYER
with two
interchangeable
nozzles



SPRAYER LANCE
with atomizer and 9 m
hose



REAR WHEEL
pivoting with parking
brake



AS STANDARD



OPTIONAL



PATENTED



SOIL

Rear tine tillers and tillers

Horticultural passion

A complete range of hobby, semi-professional and professional tools designed and manufactured in Italy: Eurosystems tillers and rear tine tillers, the result of 50 years of experience, are used for the tilling of small and medium plots of land in horticulture, gardening and small agricultural areas.

Versatile and robust, these work tools require little maintenance and are designed to last over time; at the same time, they can be accessorised with numerous options that extend their ability to be used for ploughing or gardening work.

What are the benefits?

1

We look for the perfect centre of gravity and the correct weight/rotation speed ratio of the tillers to make the task easy, safe and efficient

2

We are one of the last true European producers of this product category which means a shorter production chain, local production and less pollution

3

We design our products in order to last a long time and even today we provide spare parts for models that are more than 40 years old

Rtt3

rear tine tiller

MECHANICAL GEARBOX
chain + belt transmission



RUNNING SPEED

1.8 Km/h 2.1 Km/h
1.0 Km/h 1.1 Km/h



SEMIPROFESSIONAL



Rtt3

NEW!

ENGINE	Euro 212.ohv 212 cc 4.0 kW Petrol	Euro R210.ohv 212 cc 4.4 kW Petrol	B&S CR950 208 cc 4.0 kW Petrol	Honda GX160 163 cc 3.6 kW Petrol	Cramer/ greenworks 82 V 2.9 kW dual slot Elettrico
STARTER	recoil				
HANDLEBAR	vertically adjustable	vertically adjustable	vertically and laterally adjustable	vertically and laterally adjustable	vertically and laterally adjustable
TRANSMISSION	 gears, chain in oil bath and double belt system 2 speed fixed milling, 2 speed reverse				
TILLER	6 stars Ø32 cm – 20 bolted knives work width 60 cm 270 rpm				
OTHER	adjustable spur system for quick visual inspection of correct belt tensioning				
DRIVE WHEELS	tyres, tractor profile 13x5.00-6" with mechanical transport idler				
NET WEIGHT	72 kg	72 kg	70.5 kg	70 kg	61 kg
DIMENSIONS	63x153x109(h) cm				

	GR.WEIGHT	75-77 KG
	PACKAGING	116,5X53X70(H) CM
	PALLET	110X120X225(H) CM / Q* 6PCS



HANDLEBAR

vertically and laterally adjustable

* B&S / Honda / Greenworks only



TOOL COUPLING LEVER

with visual drive belt tensioning control system



ROTAVATOR

bolted knives
Ø32 cm 60 cm



DRIVEN WHEELS

with mechanical semi-differential



SMALL ROTAVATOR

cutter 32 cm
iron wheels Ø35x5



RIDGING PLOW

with fixed wings



AS STANDARD



OPTIONAL



PATENTED

SOIL

Rtt2

rear tine tiller

MECHANICAL REDUCER
chain + belt transmission



RUNNING SPEED

1.0 Km/h 1.1 Km/h

AMATEUR



Rtt2

	Euro 182.ohv 182 cc 3.1 kW Petrol	Euro R210.ohv 212 cc 4.4 kW Petrol	B&S CR950 208 cc 4.0 kW Petrol	Honda GP160 163 cc 3.6 kW Petrol
ENGINE				
STARTER	recoil			
HANDLEBAR	vertically adjustable	vertically adjustable	vertically and laterally adjustable	vertically and laterally adjustable
TRANSMISSION	gears, chain in oil bath and double belt system 1 fixed milling speed, reverse			
ROTAVATOR	4 stars Ø32 cm – 16 riveted knives work width 50 cm 270 rpm			
OTHER	adjustable spur system for quick visual inspection of correct belt tensioning			
DRIVE WHEELS	tyres, tractor profile 13x5.00-6" with mechanical transport idler			
NET WEIGHT	65 kg	66 kg	67 kg	66.5 kg
DIMENSIONS	53X116.5X70(h) cm			

GR.WEIGHT	71-73 KG
PACKAGING	116,5X53X70(H) CM
PALLET	110X120X225(H) CM / Q* 6PCS



HANDLEBAR
vertically
and laterally adjustable*
* B&S / Honda only



TOOL COUPLING LEVER
with visual drive belt
tensioning control system



ROTAVATOR
riveted knives
Ø32 cm 50 cm



DRIVEN WHEELS
with mechanical
semi-differential



SMALL ROTAVATOR
cutter 32 cm
iron wheels Ø35x5



RIDGING PLOW
with fixed wings



AS STANDARD



OPTIONAL




PATENTED

SOIL

Euro102

tiller

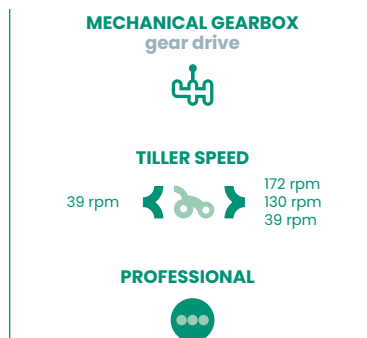

Euro102

	Euro102		
ENGINE	Honda GX160 163 cc 3.6 kW Petrol	Euro 212.ohv 212 cc 4.0 kW Petrol	Euro 178F 296 cc 4.4 kW Diesel
STARTER	recoil	recoil	recoil or electric
HANDLEBAR	vertically and laterally adjustable		
TRANSMISSION	made in Italy gearbox with gears in oil bath 3 milling speeds, reverse two power take-offs (PTO), one standard and one synchronised with the gearbox		
ROTAVATOR	6 stars Ø34 cm of which 2 removable – 24 bolted knives work width 95–65 cm tillers rotation 172/130/39 rpm		
OTHER	plant saver discs, adjustable spur		
TRANSPORT WHEELS	optional: • tractor profile tyres 5.00–10" • rubber to be assembled on plant saver discs		
NET WEIGHT	86 kg	95 kg	104 kg
DIMENSIONS	108X145X92(h) cm		

	GR.WEIGHT	94–112 KG
	PACKAGING	95X50,5X90(H) CM
	PALLET	110X120X195(H) CM / Q*4PCS



ROTAVATOR
bolted knives
Ø34 cm 95 cm
can be reduced to 65 cm
with discs



HANDLEBAR
vertically and laterally
adjustable



SPUR
4-position adjustable



TRACTOR WHEELS
pneumatic 5.00-10"



CUTTER EXTENSION
work width 112 cm



TRANSPORT WHEELS
to be assembled on discs



TAMPING MACHINE
with adjustable wings



AS STANDARD



OPTIONAL



PATENTED

SOIL

Z8

tiller

MECHANICAL GEARBOX
chain + belt transmission



TILLER SPEED

39 rpm 101 rpm
79 rpm
inverted belt 142 rpm
110 rpm

LABOUR
39 rpm 101 rpm
23 rpm
inverted belt 142 rpm
33 rpm

SEMI-PROFESSIONAL



Z8

ENGINE	Honda GX160 163 cc 3.6 kW Petrol	Euro 212.ohv 212 cc 4.0 kW Petrol	B&S CR950 208 cc 4.0 kW Petrol
STARTER	recoil		
HANDLEBAR	vertically and laterally adjustable		
TRANSMISSION	gears and chain in oil bath and belt 2+2 milling speed (rpm change via belt reversal), reverse		
ROTAVATOR	6 stars Ø33 cm of which 2 removable - 24 bolted knives work width 82-58 cm - standard tillers rotation 101/79 (inverted belt 142/110 rpm) - labour tillers rotation 101/23 (inverted belt 142/33 rpm)		
OTHER	plant saver discs, adjustable spur		
TRANSPORT WHEELS	optional, not included		
NET WEIGHT	88 kg	85 kg	88 kg
DIMENSIONS	82X162X118(h) cm		




GR.WEIGHT 93-90-93KG
PACKAGING 97X52X81.5(H) CM
PALLET 110X120X180(H) CM / Q* 4PCS



TRANSMISSION
with reversible belt to
change tiller rpm



HANDLEBAR
vertically and laterally
adjustable

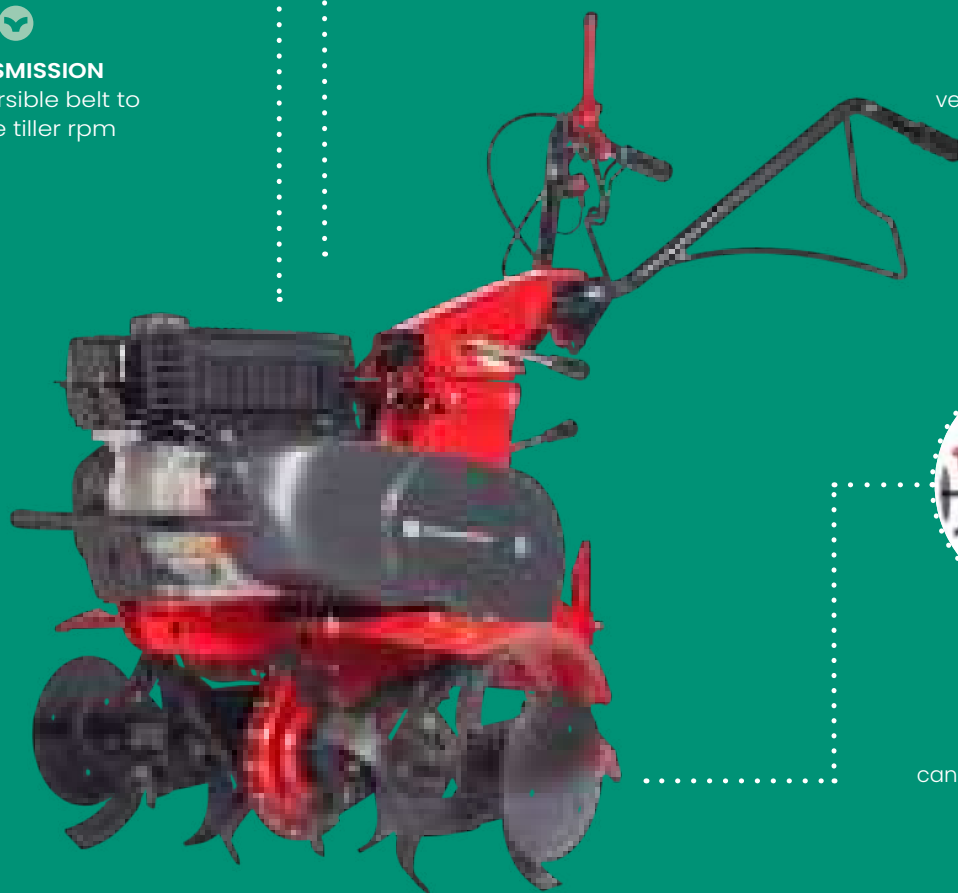

ROTAVATOR
bolted knives
Ø33 cm 82 cm
can be reduced to 58 cm
with discs



TRANSPORT WHEEL
quick tilting



**ROTAVATOR
EXTENSION**
work width 105 cm



TRANSPORT WHEELS
to be assembled on discs



RIDGING PLOW
with adjustable wings



LABOUR PRO KIT
5.00-10" wheels + Ratchets
2 ballast wheels 20 kg each
front ballast 15 kg
swivel plough

**only for Z8 labour*



AS STANDARD



OPTIONAL



PATENTED

Euro5 evo

tiller

MECHANICAL GEARBOX
chain + belt transmission

TILLER SPEED

 31 rpm 125 rpm
97 rpm

LABOUR

 31 rpm 136 rpm
27 rpm

SEMI-PROFESSIONAL


Euro5 evo 2.1

ENGINE	Honda	Honda	B&S
	GP160	GX160	CR950
	163 cc	163 cc	208 cc
	3.6 kW	3.6 kW	4.0 kW
	Petrol	Petrol	Petrol
STARTER	recoil		
HANDLEBAR	 vertically and laterally adjustable		
TRANSMISSION	gears and chain in oil bath and belt 2 milling gears, reverse		
ROTAVATOR	6 stars Ø32 cm of which 2 removable – 24 bolted knives work width 75–50 cm tillers rotation 125/97 rpm		
OTHER	plant saver discs, spur		
TRANSPORT WHEELS	quick release front transport wheel		
NET WEIGHT	58 kg	58 kg	59 kg
DIMENSIONS	75x140x132(h) cm		

Euro5 evo LABOUR

ENGINE	B&S CR950 208 cc 4.0 kW Petrol
STARTER	recoil
HANDLEBAR	vertically and laterally adjustable
TRANSMISSION	gears and chain in oil bath and belts 2 milling gears, reverse
ROTAVATOR	6 stars Ø32 cm of which 2 removable 24 bolted knives work width 75-50 cm tillers rotation 136/27 rpm
OTHER	plant saver discs, spur
TRANSPORT WHEELS	quick release front transport wheel
NET WEIGHT	59 kg
DIMENSIONS	75x140x132(h) cm



GR.WEIGHT 63-64 KG
PACKAGING 79X52X71(H) CM
PALLET 80X120X225(H) CM / Q* 6PCS

64 KG
 79X52X71(H) CM
 80X120X225(H) CM / Q* 6PCS



TRANSPORT WHEEL
quick-lift frontal



HANDLEBAR
vertically and laterally adjustable



ROTAVATOR
bolted knives
Ø32 cm 75 cm
can be reduced to 50 cm
with discs



SPUR
with 4 adjustments



AERATOR
spring-type, 50 cm



RIDGING PLOW
with fixed wings



LABOUR CLASSIC KIT
wheels 5.00-10" + fixed axles
2 ballast wheels 20 kg each
front ballast 15 kg
classic plough

**only for labour version*



AS STANDARD




OPTIONAL



PATENTED

Euro5 evo

tiller

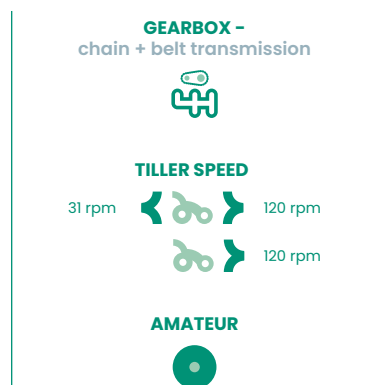

	Euro5 evo CLASSIC					NEW!	Euro5 evo ONE	
ENGINE	Euro 182.ohv 182 cc 3.1 kW Petrol	Honda GP160 163 cc 3.6 kW Petrol	Honda GX160 163 cc 3.6 kW Petrol	B&S CR950 208 cc 4.0 kW Petrol	GlobeTool 82 V 2.9 kW due slot Electric		Euro R80.ohv 78 cc 1.4 kW Petrol	
STARTER	recoil						recoil	
HANDLEBAR	 vertically adjustable or vertically and laterally adjustable						vertically adjustable	
TRANSMISSION	chain in oil bath and belt 1 milling gear, optional reverse						chain in oil bath and belt; 1 milling gear, optional reverse	
ROTAVATOR	6 stars Ø32 cm of which 2 removable - 24 riveted knives work width 75-50 cm tillers rotation 125 rpm						4 stars Ø32 cm - 16 riveted knives work width 46 cm tillers rotation 120 rpm	
OTHER	plant saver discs, spur						spur	
TRANSPORT WHEELS	quick release front transport wheel						quick release front transport wheel	
NET WEIGHT	51 kg	50.5 kg	50.5 kg	51.5 kg	42.5 kg		38 kg	
DIMENSIONS	75x125x123(h) cm						54x137x113(h) cm	

	GR.WEIGHT	54-56 KG
	PACKAGING	79X52X71(H) CM
	PALLET	80X120X225(H) CM / Q* 6PCS

GR.WEIGHT	43 KG
PACKAGING	79X52X71(H) CM
PALLET	80X120X225(H) CM / Q* 6PCS



TRANSPORT WHEEL
quick-lift frontal



HANDLEBAR
adjustable in height
or in height and laterally



ROTAVATOR
riveted knives
Ø32 cm 75 cm
can be reduced to 50 cm
with discs



SPUR
with 4 adjustments



AERATOR
spring-type, 50 cm



RIDING PLOW
with fixed wings



AS STANDARD



OPTIONAL



PATENTED

SOIL

Euro3 evo

tiller

MECHANICAL REDUCER
belt transmission



TILLER SPEED

50 rpm



130 rpm



130 rpm

AMATEUR



Euro3 evo

ENGINE	B&S	B&S	Euro	Euro
	450 E series	625 Exi series	139.ohv	R.170
	125 cc	150 cc	139 cc	173 cc
	1.8 kW	2.3 kW	2.7 kW	3.2 kW
	Petrol	Petrol	Petrol	Petrol

STARTER recoil

HANDLEBAR vertically and laterally adjustable

TRANSMISSION endless screw in oil bath and belt
1 milling gear, optional reverse

ROTAVATOR 4 stars Ø32 cm – 16 riveted knives
work width 50 cm
tillers rotation 130 rpm

OTHER plant saver discs, adjustable spur

TRANSPORT WHEELS quick release double rear wheel

NET WEIGHT	39 kg	41 kg	39 kg	41.5 kg
-------------------	-------	-------	-------	---------

DIMENSIONS 52x142x122(h) cm

	GR.WEIGHT 42-44 KG
PACKAGING	80X59X55(H) CM
PALLET	80X120X233(H) CM / Q* 8PCS



ROTAVATOR
riveted knives
Ø32 cm 50 cm
with plant saver discs



HANDLEBAR
vertically and laterally
adjustable



TRANSPORT WHEELS
quick release double
rear wheel



ROTAVATOR EXTENSION
work width 75 cm
*only B&S625/EURO R170



AERATOR
spring-type, 50 cm



RIDING PLOW
with fixed wings



AS STANDARD



OPTIONAL



PATENTED

SOIL

Z3

tiller

MECHANICAL REDUCER
belt transmission



TILLER SPEED



AMATEUR



Z3

ENGINE	B&S 450 E serie 125 cc 1.8 kW Petrol	B&S 625 Exi serie 150 cc 2.3 kW Petrol	Euro 139.ohv 139 cc 2.7 kW Petrol	Euro R.170 173 cc 3.2 kW Petrol	EGOpower+ e-powered 56 V 3,1 kW Battery
STARTER	recoil	recoil	recoil	recoil	electric
HANDLEBAR	vertically and laterally adjustable				
TRANSMISSION	endless screw in oil bath and belt 1 milling gear, optional reverse				
ROTAVATOR	4 stars Ø32 cm - 16 riveted knives work width 50 cm tillers rotation 130 rpm				
OTHER	plant-saving discs, spur				
TRANSPORT WHEELS	quick release double rear wheel				
NET WEIGHT	40 kg	42 kg	40 kg	42.5 kg	41 kg
DIMENSIONS	73x50.5x49(h) cm				

	GR.WEIGHT	43-48 KG
	PACKAGING	73X50,5X53(H) CM
	PALLET	80X120X225(H) CM / Q* 8PCS



ROTAVATOR
riveted knives
Ø32 cm 50 cm
with plant saver discs



HANDLEBAR
vertically and laterally
adjustable



TRANSPORT WHEELS
quick release double
rear wheel



ROTAVATOR EXTENSION
work width 75 cm
*only B&S625/EURO R170



AERATOR
spring-type, 50 cm



RIDGING PLOW
with fixed wings



AS STANDARD



OPTIONAL



PATENTED

SOIL

Z2

tiller

MECHANICAL REDUCER
belt transmission



TILLER SPEED

63 rpm



120 rpm



120 rpm

AMATEUR



Z2

NEW!

ENGINE	B&S	Euro	Euro
	450 E series	123.ohv	R.145
	125 cc	123 cc	145 cc
	1.8 kW	2.2 kW	2.5 kW
	Petrol	Petrol	Benzina
STARTER	recoil		
HANDLEBAR	vertically adjustable		
TRANSMISSION	endless worm gear in oil bath and belt 1 milling gear, optional reverse		
ROTAVATOR	4 stars Ø26 cm – 16 riveted knives work width 40 cm tillers rotation 120 rpm		
OTHER	spur		
TRANSPORT WHEELS	quick release double rear wheel		
NET WEIGHT	29 kg	29 kg	31.5 kg
DIMENSIONS	50x137x111(h) cm		


	GR.WEIGHT	32-34 KG
	PACKAGING	73X41,5X53(H) CM
	PALLET	90X120X225(H) CM / Q* 12PCS



TILLER
riveted knives
Ø26 cm 40 cm



HANDLEBAR
height adjustment



TRANSPORT WHEELS
quick release double
rear wheel



TILLER REDUCTION
work width 16 cm



SCARIFIER
bladed, 30 cm



AERATOR
spring-type, 50 cm



TAMPING MACHINE
with fixed wings



AS STANDARD



OPTIONAL



PATENTED

SOIL

La Zappa

tiller

MECHANICAL REDUCER
belt transmission



TILLER SPEED



110/120 rpm

AMATEUR



La Zappa

NEW!

ENGINE	B&S 450 E series	Euro 123.ohv	Euro R.145	Euro 1300 W
	125 cc 1.8 kW Petrol	123 cc 2.2 kW Petrol		230 V 20 Hz Electric
STARTER	recoil	recoil	recoil	electric
HANDLEBAR	vertically adjustable			
TRANSMISSION	endless screw in oil bath and belt 1 milling gear			
ROTAVATOR	4 stars Ø26 cm - 16 riveted knives work width 36 cm rotation of endothermic motor tillers 110 rpm, rotation of electric motor tillers 120 rpm			
OTHER	spur			
TRANSPORT WHEELS	removable front transport wheel			
NET WEIGHT	25 kg	25 kg	27 kg	23 kg
DIMENSIONS	42.5x126x106(h) cm			

	GR.WEIGHT	26-30 KG
	PACKAGING	66X38,5X46,5(H) CM
	PALLET	80X132X200(H) CM / Q* 16PCS



WHEEL
for transport frontal
removable



HANDLEBAR
height adjustment



ROTAVATOR
riveted knives
Ø26 cm 36 cm



SMALL ROTAVATOR
work width 16 cm



SCARIFIER
bladed, 30 cm



AERATOR
spring-type, 50 cm



RIDGING PLOW
with fixed wings



AS STANDARD



OPTIONAL



PATENTED

SOIL

Z1

tiller

MECHANICAL REDUCER
transmission with clutch



TILLER SPEED



140 rpm

AMATEUR



Z1

ENGINE	Euro
	900 W
	230 V
	50 Hz
	Electric
STARTER	electric
HANDLEBAR	adjustable in two pre-set positions
TRANSMISSION	endless screw in oil bath
	1 milling gear
ROTAVATOR	4 stars Ø25 cm – 16 riveted knives
	work width 34 cm
	tillers rotation 140 rpm
OTHER	fixed spur
TRANSPORT WHEELS	quick release double rear wheel
NET WEIGHT	15 kg
DIMENSIONS	43x113x105(h) cm

	GR.WEIGHT	17 KG
	PACKAGING	37X53,5X55(H) CM
	PALLET	80X120X232(H) CM / Q* 16PCS



ROTAVATOR
riveted knives
Ø25 cm 34 cm



IGNITION
electrical with safety
control



TRANSPORT WHEEL
rear with
fixed spur



SMALL ROTAVTOR
work width 16 cm



BALLAST
frontal, 4 kg



AERATOR
spring-type, 50 cm



RIDGING PLOW
with fixed wings



AS STANDARD



OPTIONAL



PATENTED

NOTE:

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....



EUROSYSTEMS S.P.A.
via G.Pastore 8 Luzzara (RE) Italy
t: 0039 0522 977 169
f: 0039 0522 977 819
info@eurosystems-spa.com
www.eurosystems-spa.com

EUROSYSTEMS DEUTSCHLAND GMBH
Im Fuchshau 14 | 73635 Rudersberg
t: 0049 07183 305 900
f: 0049 07183 305 9020
info@eurosystems.info
www.eurosystems.info